



# ITTEST

QUESTION & ANSWER

Guías de estudio precisos, Alta tasa de paso!



Ittest ofrece información actualizada de forma gratuita en un año!

<http://www.ittest.es/>

**Exam:**        **HP0-Y24**

**Title :**        **Securing HP ProCurve  
Networks**

**Version :** **DEMO**

1. What is the intended purpose of the default traffic sampling action?

- A. to help PCM+/NIM periodically begin to monitor new ports
- B. to prevent ProCurve NIM from triggering false positives
- C. to send traffic for increased analysis to an Intrusion Detection System (IDS)
- D. to allow ProCurve NIM to take immediate action against the most probable threats

**Answer: A**

2. Click the Exhibit button.

Properties Configuration

Select threat type

Threat Type IP Address Sweep

Alert configuration

Number of events 1 AND Magnitude 1

Time period 1 Minutes

Properties Configuration

Select threat type

Threat Type IP Address Sweep

Alert configuration

Number of events 1 OR Magnitude 30

Time period 1 Minutes

Properties Configuration

Select threat type

Threat Type IP Address Sweep

Alert configuration

Number of events 2 AND Magnitude 30

Time period 1 Minutes

Properties Configuration

Select threat type

Threat Type IP Address Sweep

Alert configuration

Number of events 2 OR Magnitude 30





Time period 1 Minutes

Which alert shown in the exhibit is the least sensitive?

- A. A
- B. B
- C. C
- D. D

Answer: C

3. Click the Exhibit button.

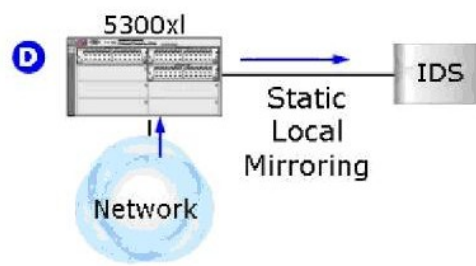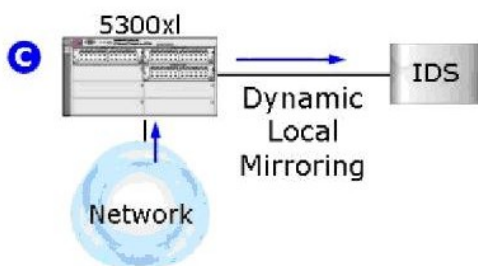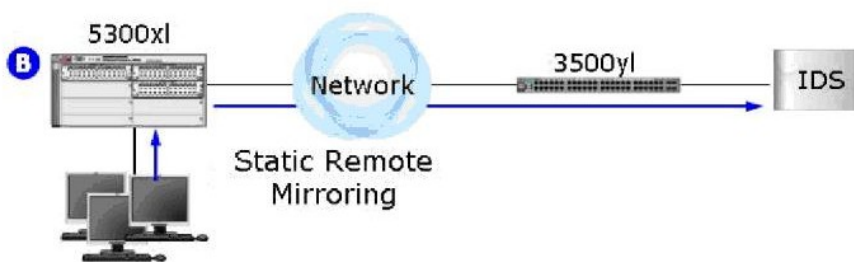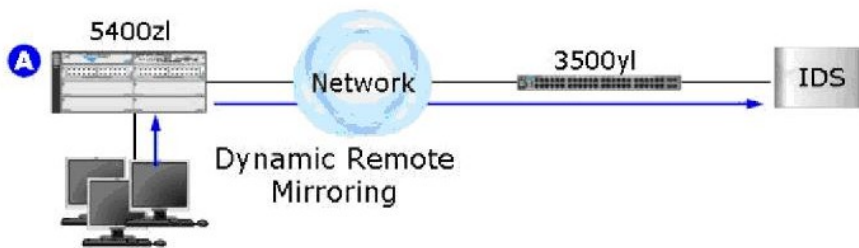

Which image in the exhibit shows an invalid NIM + IDS deployment?

- A. A
- B. B
- C. C
- D. D

Answer: B

4. Which statement is correct about the ProCurve ProActive Defense strategy?

- A. It operates at a safe distance from the points of attack and the network resources being attacked.
- B. It achieves better-performing, more scalable networks by using high capacity core resources.
- C. It enforces access and policy decisions where users and applications connect to the network.

D. It creates a cost-effective management framework by using core infrastructure protection measures.

**Answer: C**

5. Which infrastructure defense capabilities are provided by the ProCurve ProActive Defense network security solution? (Select two.)

A. vulnerability assessment database

B. connection rate filtering

C. spoofing protection of DHCP traffic

D. managed security services

E. phishing protection

**Answer: BC**

6. Which statement is correct about the threat mitigation capabilities of ProCurve NIM?

A. NIM can apply a threat mitigation action to supported infrastructure devices.

B. NIM can mitigate threats detected by NBAD, but must only log other threats.

C. NIM can detect threats but relies on an Intrusion Prevention System (IPS) to mitigate them.

D. NIM can mitigate threats from wired offenders, but not wireless offenders.

**Answer: A**

7. Network security can be described in terms of multiple layers of security. Which security layer does an unauthorized VLAN correspond to?

A. network access control

B. network immunity protection

C. control protocol detection

D. device-to-device authentication

**Answer: A**

8. Network security can be described in terms of multiple layers of security. The DHCP Spoofing and Dynamic ARP Protection features correspond to which layer?

A. infrastructure protection

- B. network immunity protection
- C. device-to-device authentication
- D. network access control

**Answer: A**

9. What is the default state of a Port Access Entity configured for IEEE 802.1X port-access authentication?

- A. disabled
- B. authorized
- C. restricted
- D. idle
- E. unauthorized

**Answer: E**

10. Which role does the authenticator play in the 802.1X authentication process?

- A. It encapsulates an EAP-access-request inside of a RADIUS response-identity packet and forwards it for validation.
- B. It creates and sends an access-challenge message to the supplicant to request client credentials.
- C. It provides two-way translation between EAP messages and RADIUS messages.
- D. It validates the EAP-identity-request and responds with either an accept or reject message.

**Answer: C**