



ITTEST

QUESTION & ANSWER

Guías de estudio precisos, Alta tasa de paso!



Ittest ofrece información actualizada de forma gratuita en un año!

<http://www.ittest.es/>

Exam : JN0-610

**Title : Cloud - Professional
(JNCIP-Cloud)**


Version : DEMO

1.Which two features of Kubernetes are supported by the Contrail CNI? (Choose two.)

- A. black list rules
- B. network isolation
- C. service chaining
- D. pod traffic shaping

Answer: A,D

2.Exhibit.

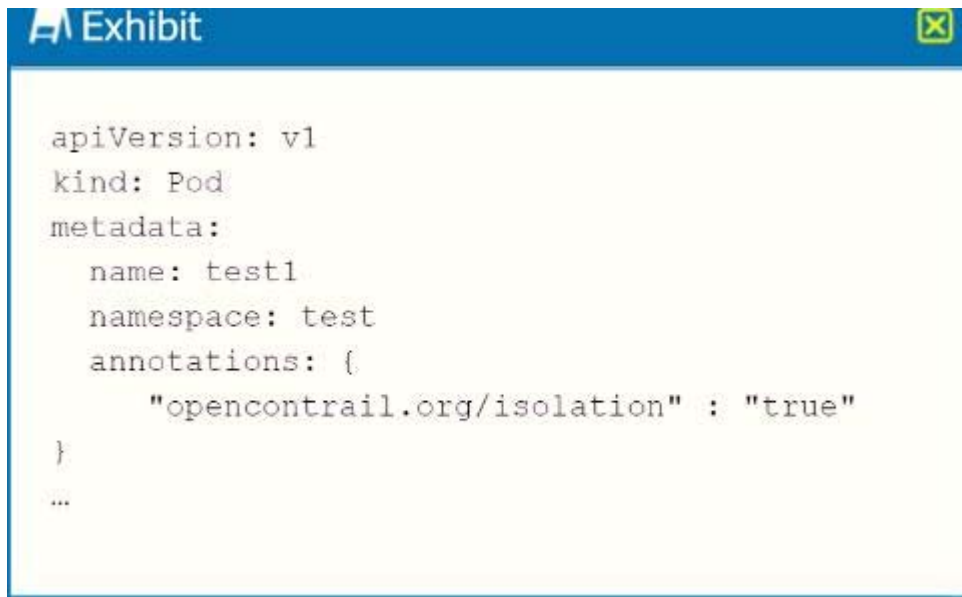

Referring to the exhibit, which two statements are correct when deploying the OpenShift pod? (Choose two.)

- A. A pod is created with the name "test1".
- B. Pods are reachable by pods in a different namespace.
- C. Pods are reachable only by pods in the same namespace.
- D. A pod is created with the name "test".

Answer: B,D

3.You are deploying Contrail Enterprise Multicloud in your environment. You must securely connect your private resources with publicly-hosted resources.

What must be included in this scenario?

- A. AppFormix
- B. Contrail Security
- C. service chaining
- D. Multicloud-Gateway

Answer: D

4.Exhibit.

The screenshot shows the AWS Management Console interface for configuring a VPC. The top section, titled "Private Subnet CIDR", contains two rows of configuration. The first row has "CIDR block*" set to "10.0.1.0/24" and "Availability zone" set to "1". The second row has "CIDR block*" set to "10.0.2.0/24" and "Availability zone" set to "2". Below these rows is a "+ Add" button. The bottom section, titled "Security Groups", contains two rule configurations. The first rule, "Allow-all-inbound", has "Direction" set to "Egress", "CIDR Block" set to "0.0.0.0/0", and "Protocol" set to "ICMP". The second rule, "Allow-all-outbound", has "Direction" set to "Egress", "CIDR Block" set to "0.0.0.0/0", and "Protocol" set to "ANY". Both rules have empty fields for "From L4 port" and "To L4 Port".

You are using Contrail Command to configure AWS. You are unable to ping your VMs within the instance you created.

Referring to the exhibit, what is the problem?

- A. You must change the protocols allowed in the "Allow-all-inbound" rule to "ANY".
- B. Your subnets are in different availability zones.
- C. You must change the direction of the "Allow-all-inbound" rule to "Ingress".
- D. Your subnets for "Availability zone 1" and "Availability zone 2" must be the same.

Answer: C

5. Into which namespace are the Contrail system components deployed in an OpenShift cluster?

- A. contrail-system
- B. openshift-sdn
- C. networking
- D. default

Answer: D