



ITTEST

QUESTION & ANSWER

Guías de estudio precisos, Alta tasa de paso!



Ittest ofrece información actualizada de forma gratuita en un año!


<http://www.ittest.es/>

Exam : C9550-270

**Title : IBM Business Process
Manager Advanced
V7.5,Integration
Development**

Version : DEMO

1. An integration developer is testing the process shown in the following exhibits.

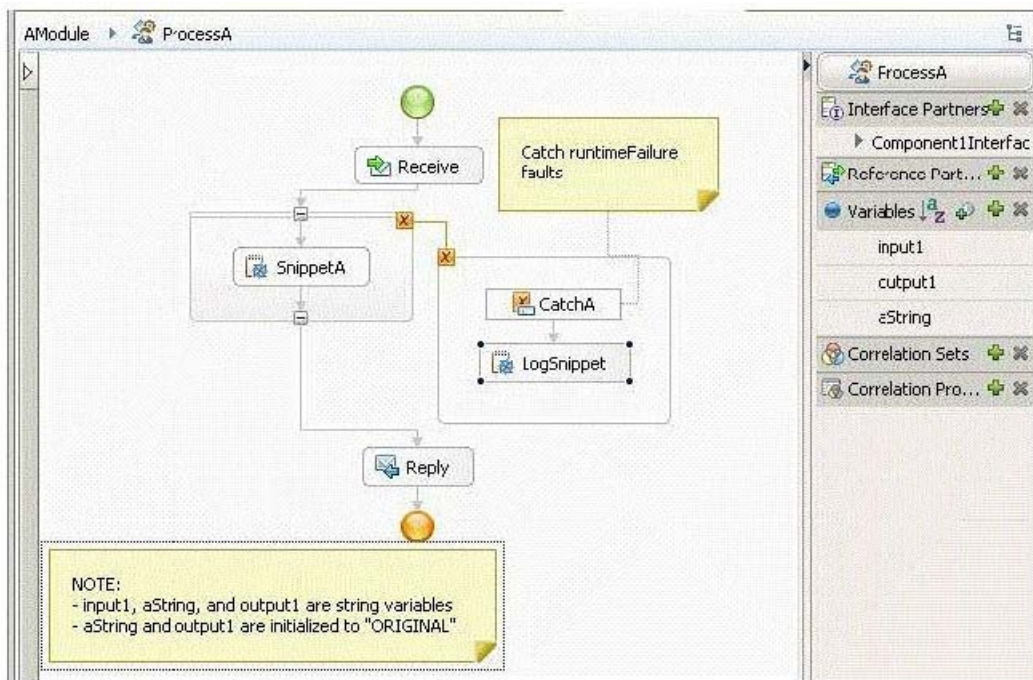

Task Flows Build Activities Properties Problems Server Logs Servers

Receive - Receive

Description: Partner:* Component1Interface Browse...

Details: Interface:* Component1Interface

Server: Operation:* operation1

Authorization: ☒ Use data type variables mapping

	Name	Type	Store into Variable
Inputs	input1	string	input1

Snippet - SnippetA

Description: ☐ Visual ☒ Java

```

/*@bpe.readOnlyVariables names="aString"*/
output1 = "MODIFIED";
aString = "MODIFIED";
if ( input1.length() != 0 ) {
    throw new IllegalArgumentException();
}

```

Snippet - LogSnippet

Description: ☐ Visual ☒ Java

```

System.out.println("output1="+output1+" :: "+
    "aString="+aString);

```


If the integration developer starts an instance of the ProcessA process with an input of "HELLO", which of the following strings will the LogSnippet snippet write to System.out?

- A. output1=ORIGINAL :: aString=ORIGINAL
- B. output1=ORIGINAL :: aString=MODIFIED
- C. output1=MODIFIED :: aString=ORIGINAL

D. output1=MODIFIED :: aString=MODIFIED

Answer: C

2. An integration developer has developed the following business process, as shown in the exhibit: The invoke activities Invoke1 and Invoke2 are synchronous invocations and execute in a few seconds. A compensation handler needs to be defined for Snippet2 following a business action from the customer. The customer considers performance to be a key requirement. How would the integration developer implement these requirements? The business process needs to be a:

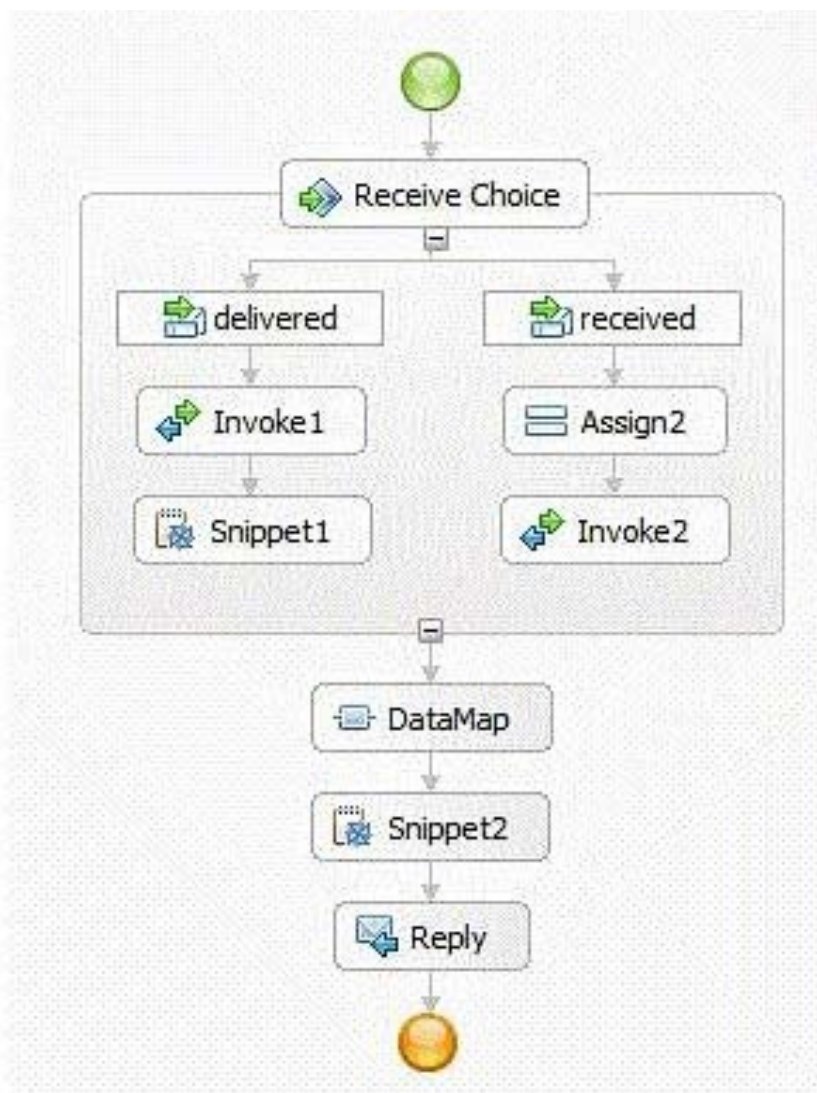

- A. long-running process because of the required fault handler.
- B. long-running process because of the required compensation handler.
- C. microflow because no human tasks are required.

D. microflow for best performance as every invoke activity uses synchronous invocation and executes quickly.

Answer: B

3.An integration developer needs to check which Common Event Infrastructure (CEI) events have been generated for a business process and review the information contained inside each event. Where will the integration developer find this information?

A. In the Common Base Event browser application.


B. In the monitoring widgets in Business Space.

C. In the administrative console -> Service Integration -> Common Event Infrastructure -> Event Service

D. In the Business Process Choreographer Explorer -> Views tab -> Process Instances -> Events generated

Answer: A

4.An integration developer has configured a business state machine, as shown below:

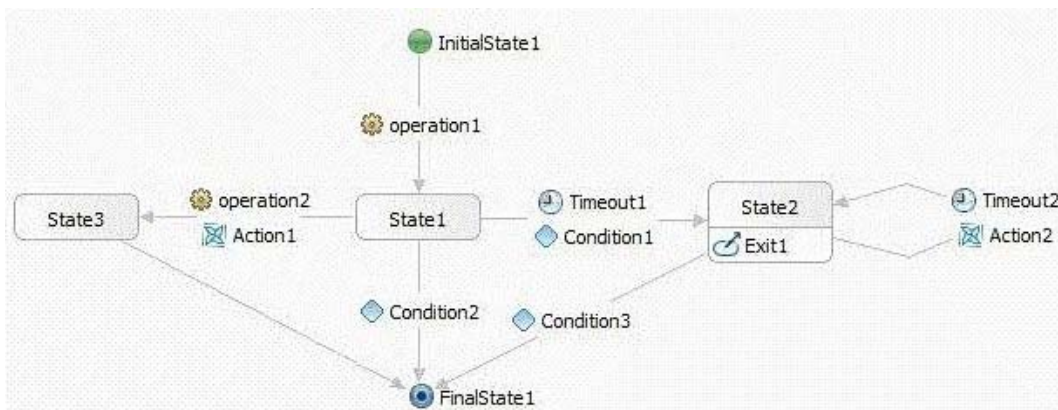

What behavior will the integration developer observe when executing the flow?

A. If Condition3 is false, then Exit1 will execute after Timeout2 expires.


B. If Condition1 and Condition2 are both true, then a runtime exception will be thrown.

C. If Condition1 is false, then Timeout1 will not be evaluated.

D. If Condition1 and Condition2 are both false, then operation2 will be called by the business state machine.

Answer: A

5. An integration developer has configured a BPEL business process for a customer, as shown below:



Execution of iterations: ☐ Sequential ☒ Parallel

Index-Variable Name:

Iteration

Define the bounds of the range to iterate over by specifying an iteration type.

Type: Expression

Start Expression:

Expression Language:

Expression Type: ☐ Visual ☒ Java

```
return min;
```

End Expression:

Expression Language:

Expression Type: ☐ Visual ☒ Java

```
return max;
```

Early Exit Criterion

Define when to exit the iteration.

Type: ☐ Count successful iterations only

Assume that max is greater than min. What should the integration developer take into account when implementing this for each loop?

- A. There must be an array associated with the for each loop.
- B. It is possible to exit the loop before Index is equal to max.
- C. The values of min and max cannot be changed once the for each activity begins.
- D. If the scope inside of the for each activity is set to isolated, then the activities will run sequentially.

Answer: D